

FEATURES :

- Universal Input 90~264VAC
- High Efficiency Up To 82%
- Protection: Short Circuit /Overload/Over Voltage
- Fully Encapsulated Plastic Case
- Internal Input Filter
- 3 Years Warranty
- ROHS Compliant

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Wattage	Output Voltage	Output Current	Ripple & Noise	Efficiency
	(W)	(VDC)	(mA)	(mV) max (Note)	(TYP %)
GA010-S03	10.0	3.3	3000	100	74
GA010-S05	10.0	5	2000	100	76
GA010-S12	12.0	12	1000	150	80
GA010-S15	12.0	15	800	150	80
GA010-S24	12.0	24	500	240	80
GA010-S48	12.0	48	250	240	82
GA010-D05	10.0	±5	±1000	100	75
GA010-D12	12.0	±12	±500	150	75
GA010-D15	12.0	±15	±400	150	75
GA010-D24	12.0	±24	±250	240	77
GA010-D0512	10.0	Vo1=+5, Vo2=+12	Io1=1500, Io2=200		74
GA010-D0515	10.0	Vo1=+5, Vo2=+15	Io1=1400, Io2=200	100(Vo1) 150(Vo2)	74
GA010-D0524	10.0	Vo1=+5, Vo2=+24	Io1=1200, Io2=200		75

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Rated Input Voltage	Vo, Io nom		100~240		Vac
Voltage Range	Vo, Io nom	AC in	90	264	Vac
		DC in	120	370	Vdc
Line frequency	Vi nom, Io nom	47	50/60	63	Hz
Inrush Current	Io nom	Vi:115VAC		10	A
		Vi:230VAC		20	A
Input Fuse	VDE/UL/CCC FUSE 2.5A/250V (Slow blow)				

YUAN DEAN SCIENTIFIC




AC-DC Converter

GA010 SERIES


10Watt

3KV Isolated

Single & Dual Output Module

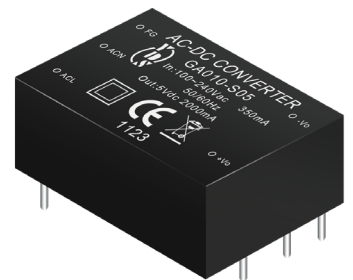

Temperature Derating Graph

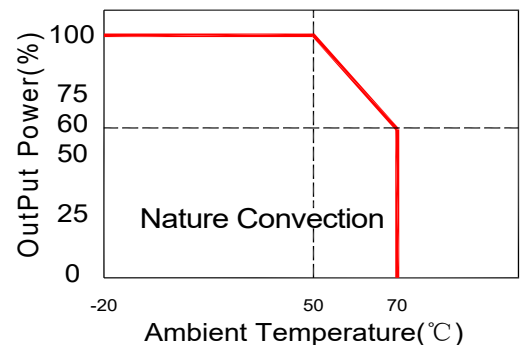

www.yds.com.tw



TEL : 886-6-3842899 FAX : 886-6-3843288
E-MAIL : ydsweb@yds.com.tw

Rev:0 2017/7/26

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Output Voltage Accuracy	Vi nom, lo nom (Single output)	3.3V,5V Models		±3	%
		12...48V Models		±2	%
	Dual Output			±5	%
Minimum Load	Vi nom	Single Output Models	0		%
		Dual Output Models (each output)	20		%
Line Regulation	lo nom, Vi min...Vi max		±1		%
Load Regulation	lo min~lo nom	Single Output Models		±2	%
		Dual Output Models		±5	%
Transient Recovery time	Vi nom, lo nom= ↔0.5 lo nom		1000		us
Protection	Over load	Above 110% rated output power Protection type: Recovers automatically after fault condition is removed			
	Short circuit	Recovers automatically after fault condition is removed			
	Over Voltage (Main Output)	120%-150% rated output Voltage Protection type: Zener diode clamp			

Note :

Ripple & noise is measured by using 20 MHz bandwidth, measured with a 47uf paralleled with a high-frequency 0.47uf capacitor across each output by full load.

General Specifications


Parameters	Conditions	Min	Typ	Max	Units
Switching Frequency	Vi nom, lo nom		65		KHz
Isolation Voltage	Input / Output	3KVac/ 5mA/5Secs			
Isolation Resistance	Input / Output, @500 Vdc	100			MΩ
Operating Temperature	Operating at Vi nom, lo nom	-20		+70	°C
Derating	Vi nom, lo nom +51 to 71°C			2	%/°C
Storage Temperature	Non Operational	-40		+85	°C
Relative Humidity	Vi nom, lo nom			95	% RH
Safety Standards		EN60950-1 approved			
EMI Conduction & Radiation		Compliance to EN55022			
EMS Immunity		Compliance to EN55024			
Dimension		L63.50x W44.45 x H19.05mm L2.5x W1.75 x H0.75 inches			
Cooling		Free air convection			

Part Number


G A 010 - S 03
A B C D E

A: Series
B: Package
C: Output Watt
D: Single (S) Dual (D)
E: Output Voltage


Circuit Schematic(1)

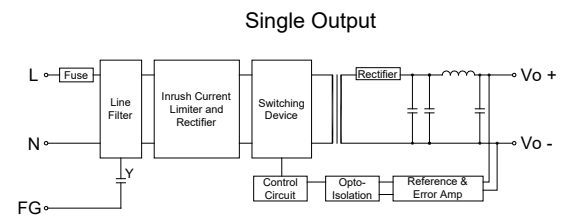


Circuit Schematic(2)

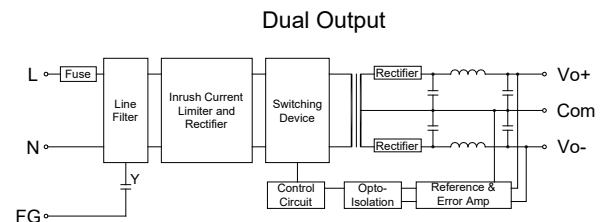

Circuit Schematic(3)

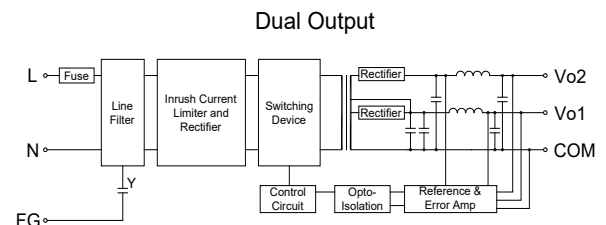

Markings and Dimensions

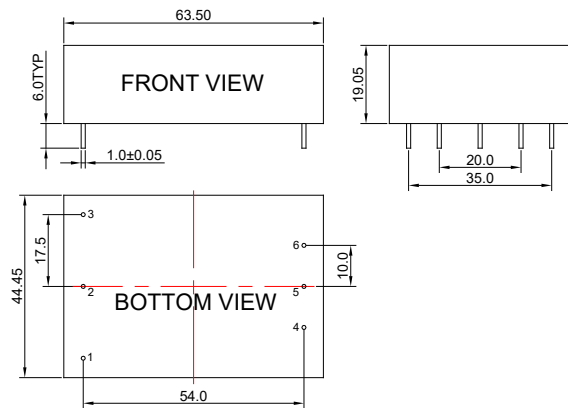

PIN	Model		
	Single	Dual	Dual
1	FG	FG	FG
2	ACN	ACN	ACN
3	ACL	ACL	ACL
4	-Vo	-Vo	+Vo2
5	NO PIN	COM	COM
6	+Vo	+Vo	+Vo1

Unit : mm Unless otherwise specified, all tolerances are ± 0.50